

VRLA Rechargeable Battery

BC100-12 (BC100-12FR)

FEATURES

- Maintenance free(no water topping-up required)
- No free acid(Non-spillable battery)
- Can be used in any orientation(excluding used inverted)
- Flame-arrestor is installed to ensure safety
- Carry handles for easy installation
- Absorbent Glass Mat technology for efficient gas recombination

APPLICATION

- UPS
- Golf-Carts
- Telecom

SPECIFICATIONS

Nominal Voltage	12V	
Nominal Capacity	20 Hour Rate (5.0A, 10.5V)	100 Ah
	10 Hour Rate (9.5A, 10.5V)	95 Ah
	5 Hour Rate (17.0A, 10.5V)	85 Ah
	1 Hour Rate (60.0A, 9.3V)	60 Ah
Approx. Weight	28.5Kg(62.8lbs.)	
Terminals	B3 (Fitting M6 bolt & nut) I2 is optional	
Max. Discharge Current	800 A (5 sec.)	
Max. Charge Current	25 A	
Operating Temperature Range	Charge	0°C~40°C(32°F~104°F)
	Discharge	-20°C~50°C(-4°F~122°F)
	Storage	-20°C~40°C(-4°F~104°F)
Self Discharge	< 3% per month (25°C)	
Internal Resistance	≤ 6.0mΩ (Fully Charged)	




CONTAINER MATERIAL

- BC100-12:
ABS: UL 94-HB (Dark gray color)
- BC100-12FR:
ABS: UL 94-V0 (Light gray color)


 ISO 9001	 ISO 14001
 MH19884 UL	 C4M20310-2474-E-16 CE
● IEC60896	● JIS C 8704
● GB/T 19638	

OUTER DIMENSIONS mm(inch)

Length (L)	Width (W)	Container Height (H)	Total Height (TH)
329±2.0(12.95±0.08)	172±2.0(6.77±0.08)	215±2.0(8.46±0.08)	B3:238±2.0(9.37±0.08) I2:220±2.0(8.66±0.08)

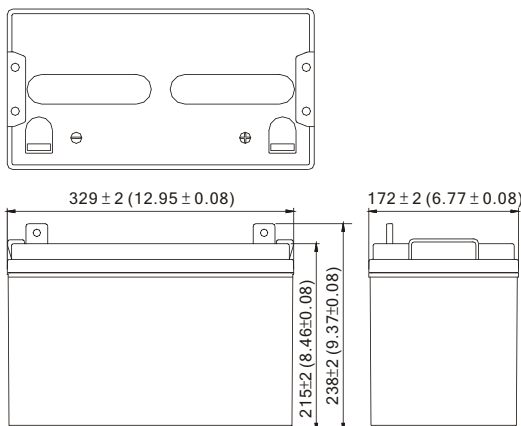


TERMINAL TYPE

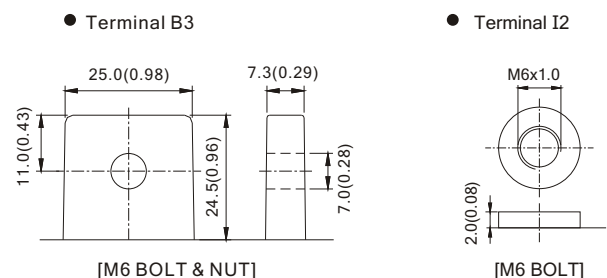


Terminal Hardware Initial Torque: B3,I2(5.5Nm±5%)

BC100-12 (BC100-12FR) discharge characteristics (25°C/77°F)

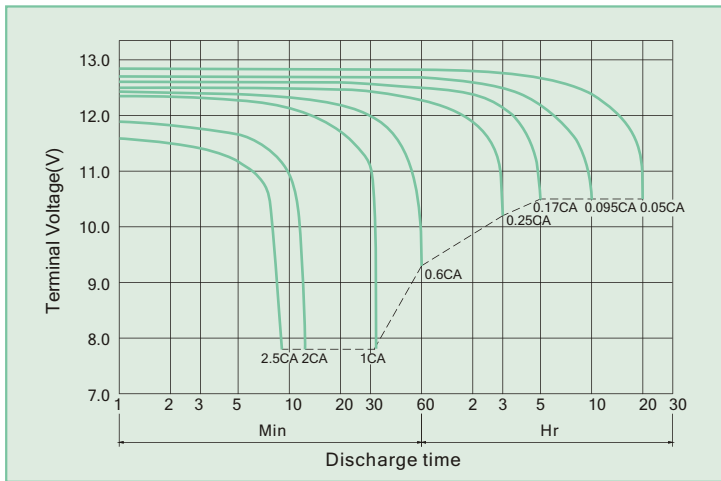


Battery Charging Characteristics

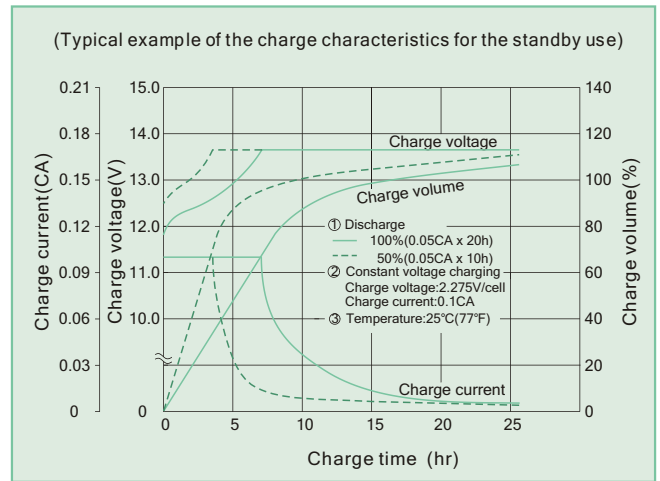

Charging Procedure

Application	Charging method	Charging Voltage at 25°C (V/cell)	Temperature compensation coefficient of charging voltage (mV/°C/cell)	Max. charging current (CA)	Charging time 0.1CA, 25°C (h)		Temp (°C)
					100% discharge	50% discharge	
For standby power Source	Constant voltage & Constant current charging (with current restriction)	2.25~2.30	-3	0.3	24	20	0~40 (32~104°F)
For cycle service		2.40~2.50	-4	0.3	16	10	

Effect Of Temperature On Long Term Float Life

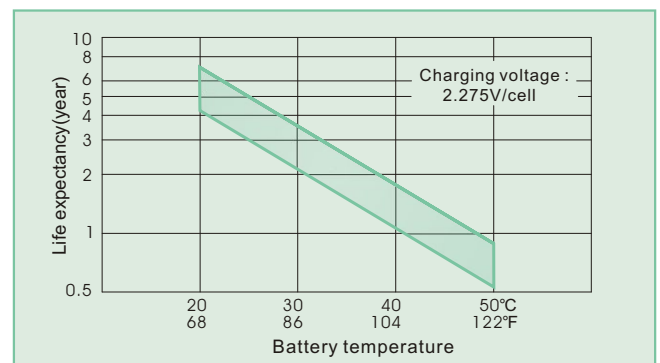

Constant power discharge characteristics at 25 °C/77 °F Unit: W

F.V. (V/cell) \ Discharge Time	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	2049.3	1673.1	1133.4	713.2	291.5	201.0	112.3	59.1
1.75V	2219.4	1749.6	1177.1	734.6	297.3	204.0	114.0	60.0
1.70V	2295.9	1802.7	1203.7	747.8	300.0	205.1	114.6	60.3
1.65V	2354.4	1845.0	1220.8	756.9	302.1	205.8	114.9	60.5
1.60V	2402.1	1881.0	1233.1	764.4	303.9	206.4	114.9	60.5

Constant current discharge characteristics at 25 °C/77 °F Unit: A

F.V. (V/cell) \ Discharge Time	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	184.8	149.5	97.0	59.9	24.3	16.8	9.4	4.9
1.75V	200.3	156.3	100.7	61.7	24.8	17.0	9.5	5.0
1.70V	207.4	161.2	103.1	62.9	25.0	17.1	9.6	5.0
1.65V	216.3	164.9	104.5	63.6	25.2	17.2	9.6	5.0
1.60V	224.7	168.2	105.5	64.2	25.3	17.2	9.6	5.0

All data shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.

Trial A/1 REV. July. 2010

USA:
B&B BATTERY(USA) INC.
6415 RANDOLPH ST.COMMERCE, CA,90040 U.S.A.
TEL:1-323-278-1900.1-800-278-8599
FAX:1-323-278-1268
E-Mail:sales@bb-battery.com

CHINA FACTORY:
B.B. BATTERY CO., LTD.
CHENG DONG TRIAL AREA,HUANG GANG,
RAOPING, GUANG DONG,CHINA,515700
TEL:86-768-7601001-2
FAX:86-768-7601469
E-Mail:maggy@bb-battery.com

EUROPE:
B&B BATTERY(EUROPE) B.V.
SUITE 8, HAAKSBERGWEG 33, 1101
BP AMSTERDAM,THE NETHERLANDS
TEL: 31-30-3200190
MOBILE: 886-933896989
E-Mail: gary@bb-battery.com

HONG KONG:
B&B BATTERY(Hong Kong) Co.
TEL:852-2311-4918
FAX:852-2739-1182
E-Mail:bbhk@hkstar.com

JAPAN:
B&B BATTERY(JAPAN) CO., LTD.
1375-11 NARAHARA-MACHI,HACHIOJI,
TOKYO 193-0803,JAPAN.
TEL:81-426-25-6375
FAX:81-426-25-6375
E-Mail:miyata@bb-battery.com

TAIWAN:
B.B. BATTERY(TAIWAN) CO., LTD.
TEL:886-6-502-5150
FAX:886-6-589-8087
E-Mail:kevin@bb-battery.com